


TYPICAL STREET SECTION
HIGH TRAFFIC VOLUME

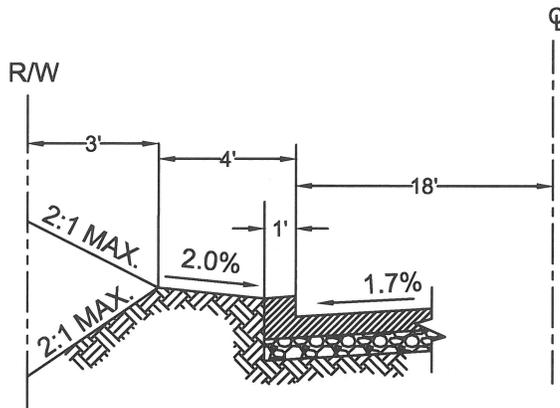

DIKE DETAIL
(SEE NOTE #4)

NOTES:

1. THIS STANDARD ONLY APPLIES TO APPROVED LOCATIONS AS SHOWN ON STANDARD PLAN 113-2 AND 113-3.
2. COMBINED THICKNESS OF BASE AND PAVING TO BE DETERMINED BY SOIL TEST.
3. MINIMUM THICKNESS FOR A.C. IS 0.33'; FOR AGGREGATE BASE IS 0.50'.
4. TO CONTROL DRAINAGE, PREVENT EROSION OR IF THE ROADWAY GRADIENT IS 6% OR GREATER, A.C. DIKES MAY BE REQUIRED. A.C. DIKES AND WIDER PAVEMENT MAY BE ADDITIONALLY REQUIRED FOR SAFETY, DRAINAGE, PEDESTRIAN WALKWAYS AND/OR CONTINUITY AS DETERMINED BY THE PUBLIC WORKS DIRECTOR.
5. SEE STANDARD 100 FOR DESIGN CRITERIA.
6. ONE STREET LIGHT (PER CITY STANDARD PLAN 502, 5800 LUMEN) MAY BE REQUIRED AT STREET INTERSECTIONS.


| REVISIONS: | | | APPROVED BY: | CITY OF CORONA | |
|----------------------|----------|--------------------|-------------------------------|---------------------------|----------------------------------|
| NO. | DATE | APPRV'D | | 11/23/09 | RURAL ROAD |
| 1 | 12-16-14 | <i>[Signature]</i> | CITY ENGINEER KIP D. FIELD | DATE | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| RCE NO. <u>45679</u> | | | | EXP. DATE <u>12-31-12</u> | STANDARD PLAN NUMBER: 113 |
| | | | | | SHT 1 OF 3 |



| REVISIONS: | | |
|------------|---------|-----------|
| NO. | DATE | APPRV'D |
| 1 | 7-17-14 | <i>MM</i> |
| | | |
| | | |
| | | |

APPROVED BY: *Kip D. Field* 11-23-09
 CITY ENGINEER DATE
 KIP D. FIELD
 RCE NO. 45679 EXP. DATE 12-31-12

CITY OF CORONA
 APPROVED LOCATIONS FOR
 RURAL ROADS
 STANDARD PLAN NUMBER: **113** SHT 2 OF 3

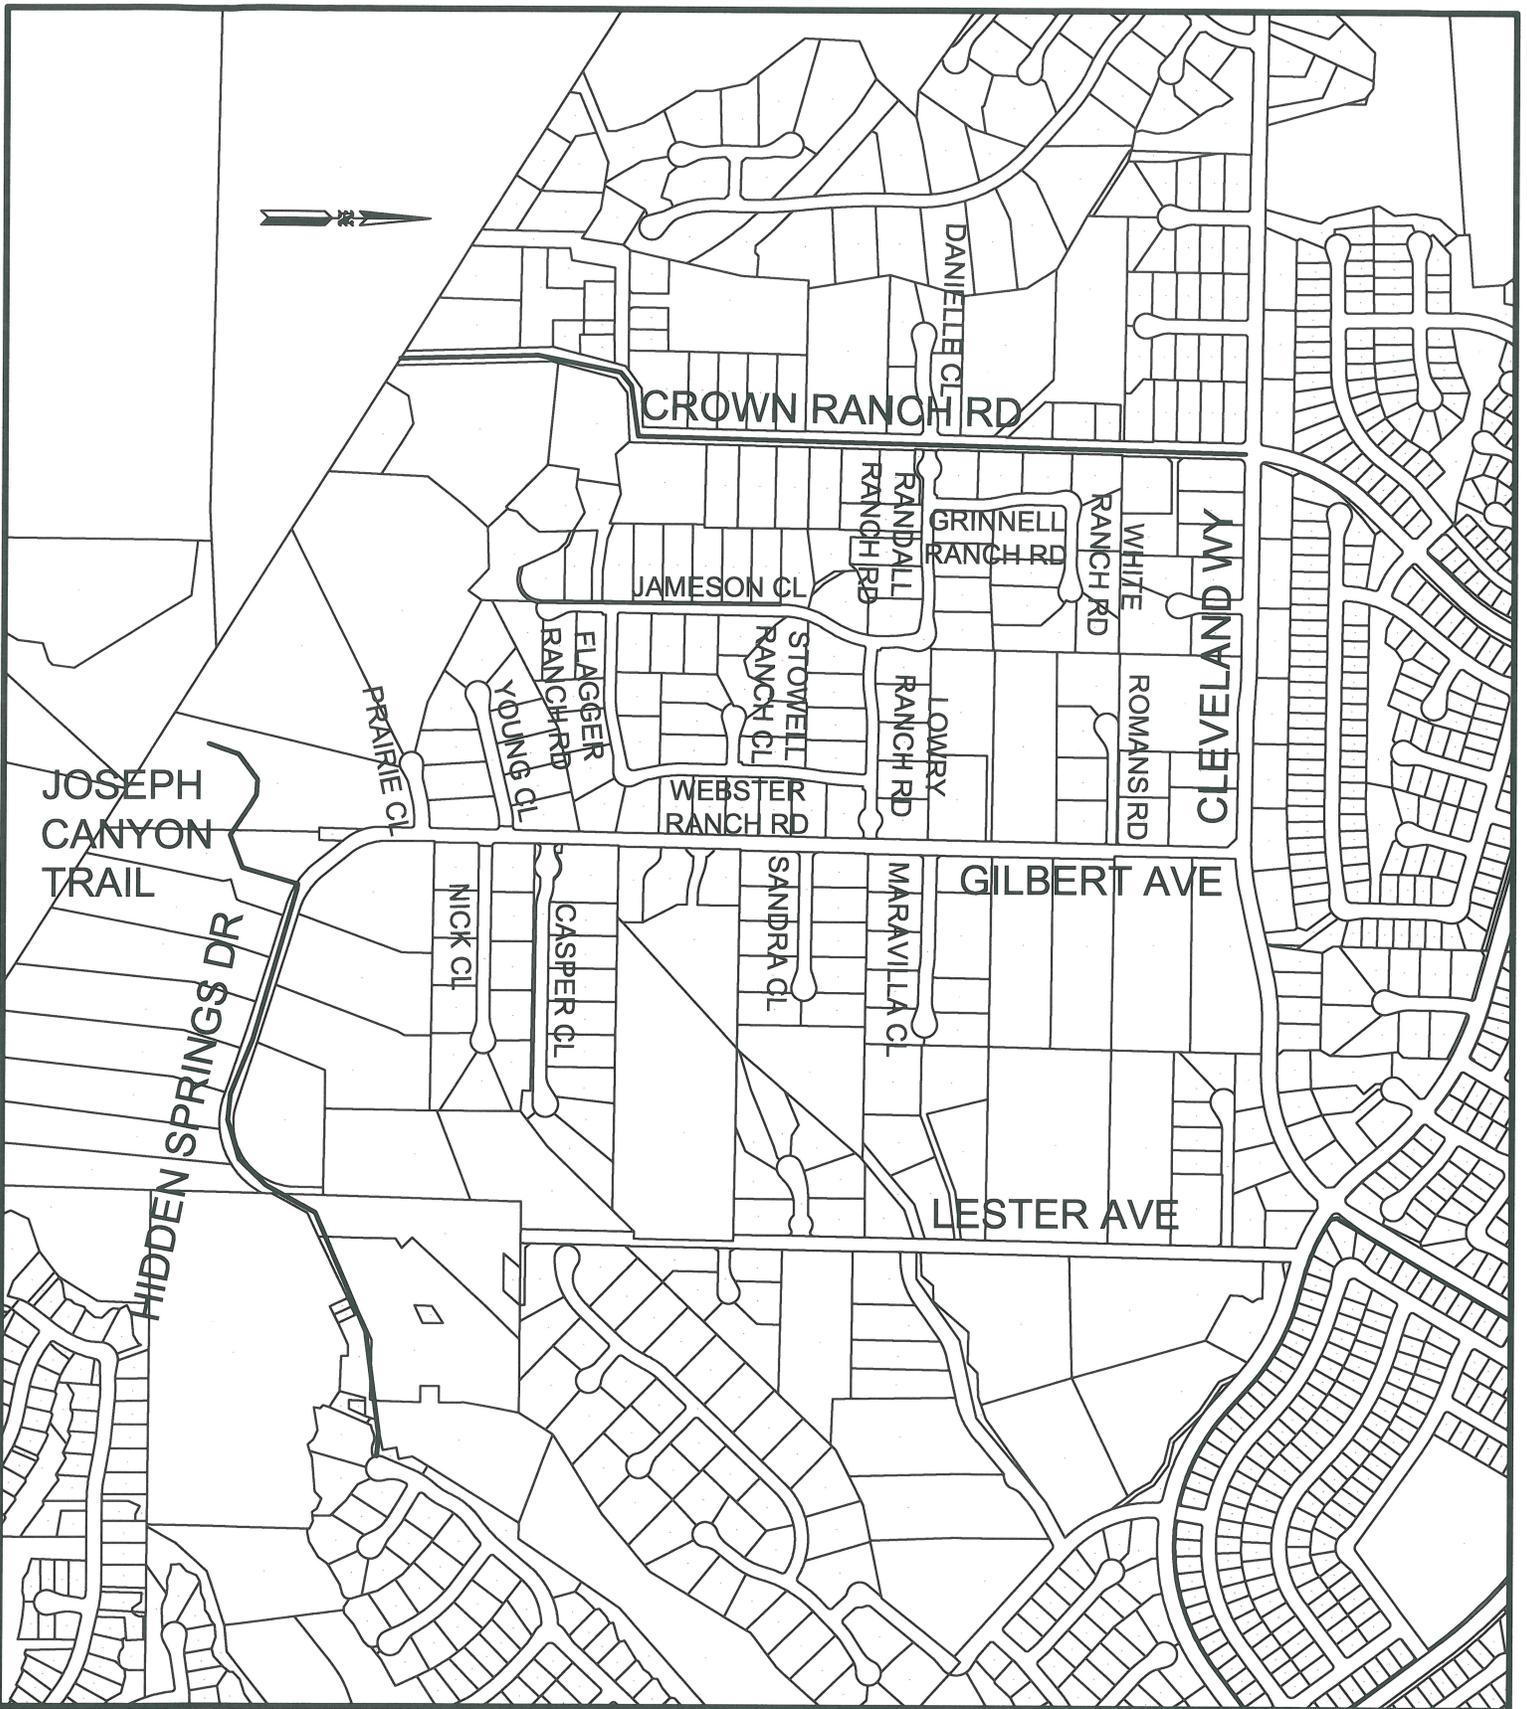

APPROVED BY:
Kip D. Field
 CITY ENGINEER
 KIP D. FIELD

11/23/09
 DATE

| REVISION | DESCRIPTION | BY | DATE |
|----------|-------------|----|------|
| | | | |

CITY OF CORONA

APPROVED LOCATIONS FOR RURAL ROADS

STANDARD PLAN NUMBER: **113** SHT 3 OF 3