

APPROVED BY:
Kip D. Field
 11/23/09
 CITY ENGINEER DATE
 KIP D. FIELD


CITY OF CORONA

SURVEY MONUMENT

REVISION	DESCRIPTION	BY	DATE

STANDARD PLAN NUMBER: 155


SHT 1 OF 2

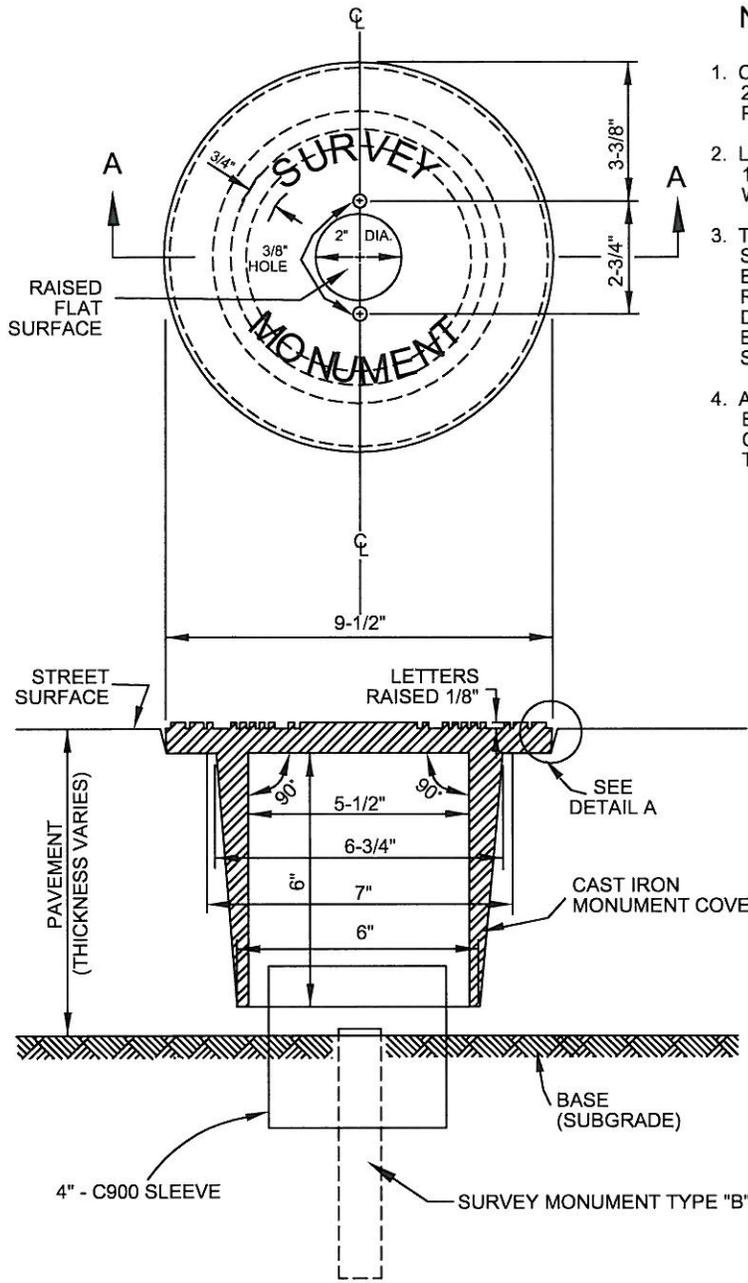

SECTION "A-A"

NOTES

1. CAST IRON SHALL CONFORM TO SECTION 206-3 OF "STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION."
2. LETTERING SHALL BE AS SHOWN HEREON, 1/8" HIGH, AND SHALL BE CAST INTEGRAL WITH THE CASTING.
3. THE 3/8" DIAMETER HOLES IN THE COVER SHALL BE AS SHOWN HEREON, AND SHALL EITHER BE FORMED BY PROVIDING A REMOVABLE PLUG PRIOR TO CASTING OR DRILLED AFTER CASTING HAS COOLED AND BEFORE COATING IS APPLIED. THE HOLES SHALL NOT BE PUNCHED.
4. AFTER CASTING HAS COOLED, IT SHALL BE GIVEN AN ASPHALTIC COATING CONFORMING TO SECTION 206-3.6 OF THE STANDARD SPECIFICATIONS.

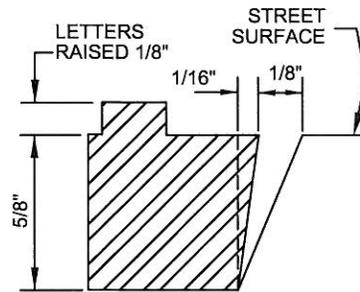

DETAIL A



APPROVED BY:
Kip D. Field 11/23/09
 CITY ENGINEER DATE
 KIP D. FIELD

CITY OF CORONA

SURVEY MONUMENT

REVISION	DESCRIPTION	BY	DATE
----------	-------------	----	------

STANDARD PLAN NUMBER: 155