



- BANDIT - 206 STAINLESS STEEL  
3/4" OR 19.05mm WIDTH  
0.030" OR 0.76mm THICKNESS
- BRACKET - BANDIT, D021 STAINLESS STEEL BOLT  
AND WASHER FLARED LEG STAINLESS STEEL.
- BUCKLES - BANDIT, C256. EAR LOCKED  
TYPE 201 STAINLESS STEEL 3/4" OR 19.05mm.
- BOLTS - 1" X 5/16" COARSE THREAD STAINLESS STEEL.
- WASHERS - ALL SIGNS SHALL BE INSTALLED WITH 5/16" ZINC  
COATED WASHERS LARGER THAN THE HEAD OF THE BOLT.  
ANY SIGN 24" OR LARGER SHALL BE INSTALLED WITH  
WASHERS NO LESS THAN 1" OUTSIDE DIAMETER  
ANY SIGN 30" OR LARGER SHALL BE INSTALLED WITH  
WASHERS NO LESS THAN 1-1/2" OUTSIDE DIAMETER  
(FENDER WASHER).

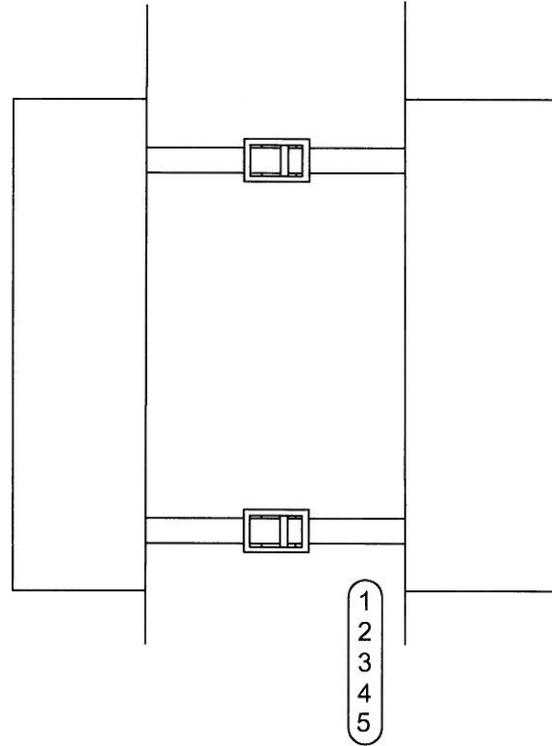

NOTES:

1. THE MINIMUM VERTICAL CLEARANCE SHALL BE 7' TO THE BOTTOM OF THE LOWEST SIGN ON THE MARBELITE.
2. THE SIGN SHALL BE BANDED TO THE FLAT SURFACE OF THE MARBELITE THAT BEST ACCOMMODATES A 90 DEGREE ANGLE TO ON COMING TRAFFIC UNLESS OTHERWISE SPECIFIED.
3. THE BAND SHALL BE TIGHTENED TO A POINT AT WHICH IT DOES NOT BREAK, YET PREVENTS MOVEMENT BY HAND OF THE SIGN, BAND, OR BRACKET.
4. ALL SIGNS BEING BANDED TO MARBELITE SHALL HAVE NO LESS THEN 2 BANDS (UPPER AND LOWER). ANY SIGN LARGER THAN 36" SHALL HAS NO LESS THAN 3 BANDS (UPPER, LOWER, AND MIDDLE)
5. UNDER NO CIRCUMSTANCES SHALL THE BANDS COVER THE IDENTIFICATION TAG ON THE MARBELITE.

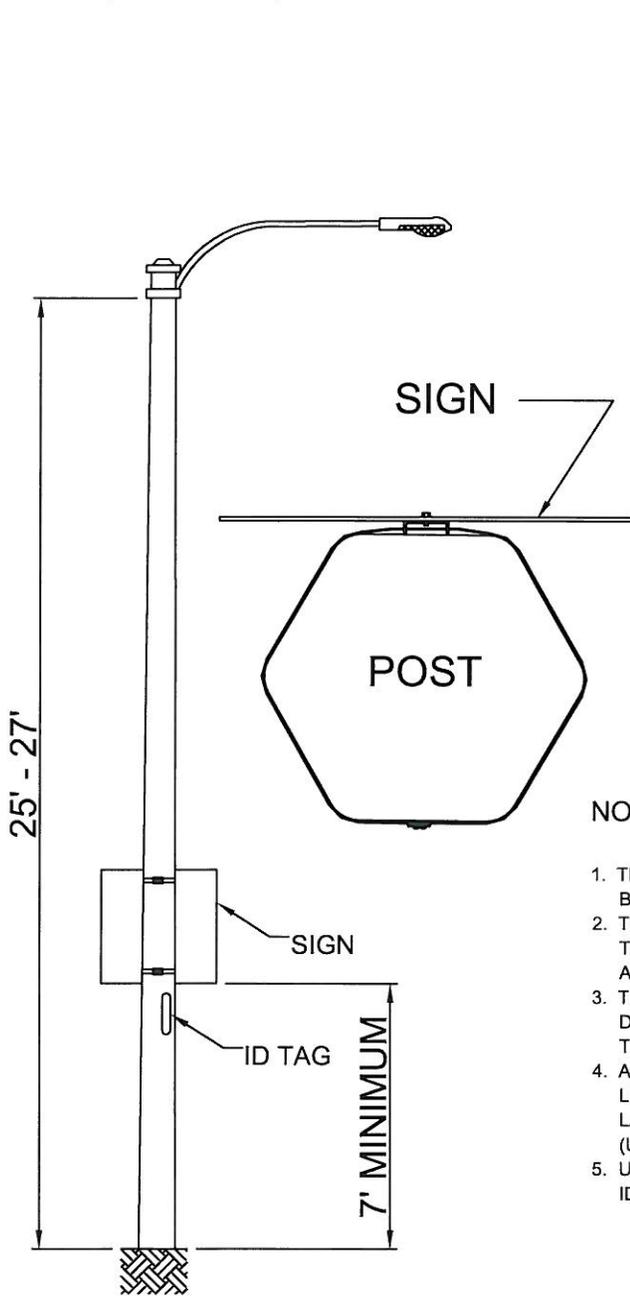

APPROVED BY:  
  
 11/23/09  
 CITY ENGINEER DATE  
 KIP D. FIELD

CITY OF CORONA

MARBELITE  
SIGN INSTALLATION

REVISION	DESCRIPTION	BY	DATE

STANDARD PLAN NUMBER: 518