



**CONCRETE PAVING  
(EXPANSION JOINT)**

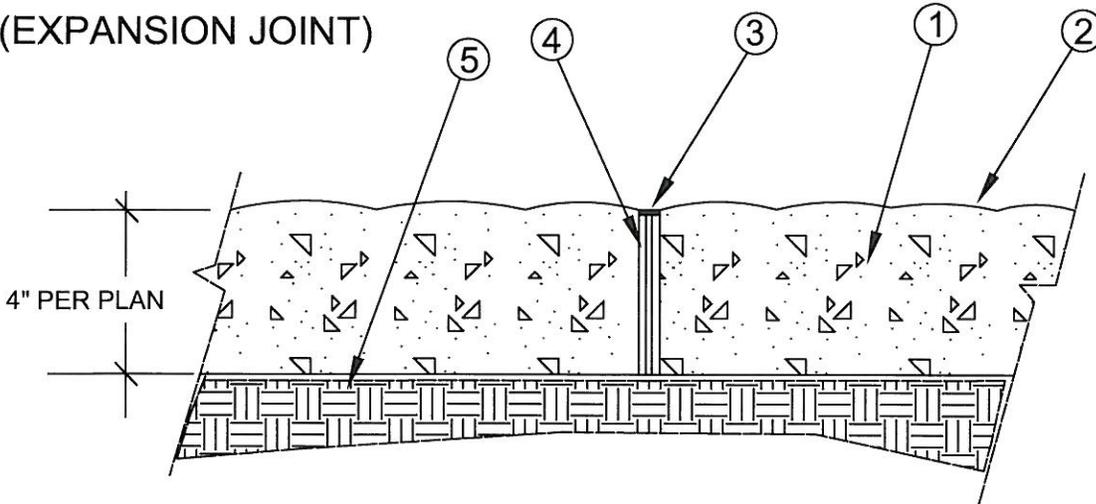

1. CONCRETE PAVING PER PLAN.
2. STAMP FINISH.
3. POLYURETHANE CAULKING TO MATCH CONCRETE COLOR.
4. 1/2" PREMOLD FIBER EXPANSION JOINT @ +/-20' O.C., EXPANSION JOINT TO FOLLOW GROUT LINE IN PATTERN.
5. 90% COMPACTED SUBGRADE.

**CONCRETE PAVING  
(SCORE JOINT)**

1. FINISH TO BE STAMPED, SEE #2 ABOVE.
2. CONCRETE PAVING PER PLAN.
3. CONCRETE SHALL BE DEEP SCORED TO A 3 1/2" DEPTH THEN FINISHED WITH A STRAIGHT EDGE TO A DEPTH OF 1/2" @ +/- 10' O.C. - CONTROL JOINT TO FOLLOW GROUT LINE IN PATTERN.
4. WHERE PAVING IS BEING INSTALLED ADJACENT TO EXISTING PAVING, 1/2" PREMOLDED EXPANSION JOINT MATERIAL SHALL BE PLACED BETWEEN NEW AND EXISTING PAVING PRIOR TO POURING.
5. CONCRETE SAW CUTTING CANNOT BE SUBSTITUTED FOR SCORE JOINTS.

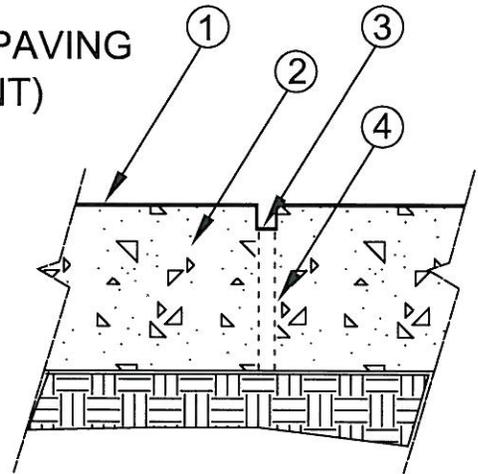

APPROVED BY:  
  
 CITY ENGINEER  
 KIP D. FIELD  
 11/23/09  
 DATE

**CITY OF CORONA**

**CONCRETE PAVING**

REVISION	DESCRIPTION	BY	DATE

STANDARD PLAN NUMBER: **822** SHT 1 OF 1